



# PSU test report

*Bernhard Woerndl-Aichriedler  
bwa@xdevelop.at*

## 1 Contents

- General information
- Point of operation
- Standby power consumption
- Load testing
- Turn on voltage
- Conducted EMI
- Overload testing

## 2 General information

Testing the following device

Manufacturer: Vigortronix  
Device name: VTX-214-001-112  
Serial number: 1  
Nominal voltage: 12.000V  
Nominal current: 0.085A  
Tester: Bernhard Woerndl-Aichriedler <bwa@xdevelop.at>  
Start time: 14-Jul-2016 01:06:49

### 3 Point of operation

The test has been conducted with the following conditions

Voltage/Frequency: 250V-50Hz  
Ambient Temperature: 31.59C





## 4 Standby power consumption

Voltage: 250.68V

Frequency: 50Hz

-----  
Current: 0.004128A

-----  
P active: 0.226W

P apparent: 1.031VA

P reactive: 1.006VAR

P factor: 0.220

-----  
Output voltage: 11.976V



## 5 Load testing

Characteristics

Voltage: 250.68V

Frequency: 50Hz

Loads: 0.000A to 0.085A

-----  
Minimum output voltage: 11.964V

Maximum output voltage: 11.980V

Regulation error absolute: -0.036V/+0.020V


Regulation error relative: -0.3%/+0.2%



-----  
Vpp ripple&noise absolute: 0.480V


Vpp ripple&noise relative: 4.0%

-----  
RMS ripple&noise absolute: 0.039V

RMS ripple&noise relative: 0.3%

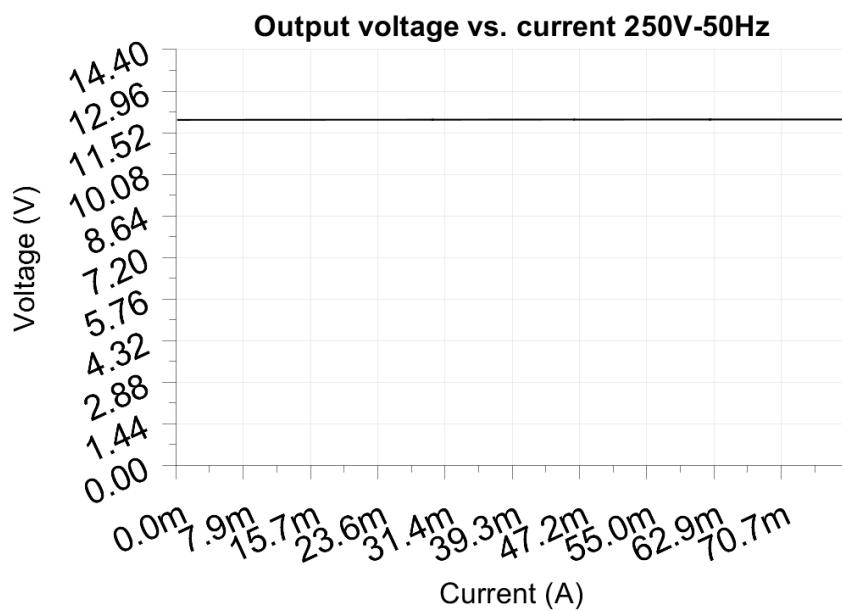

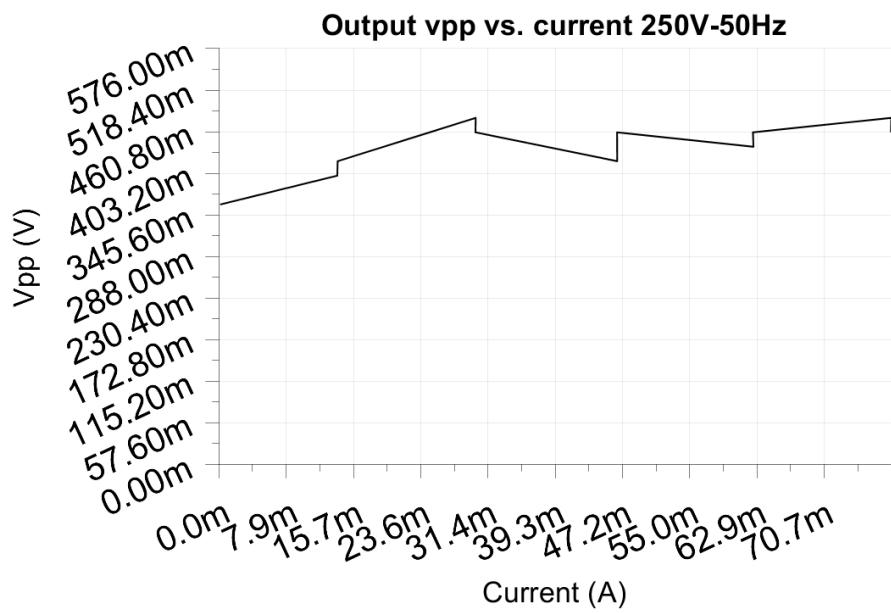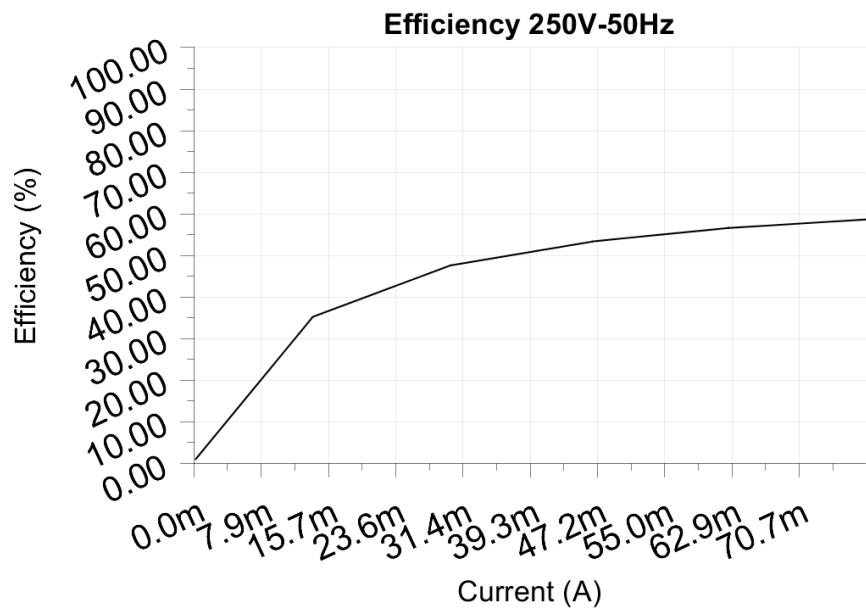


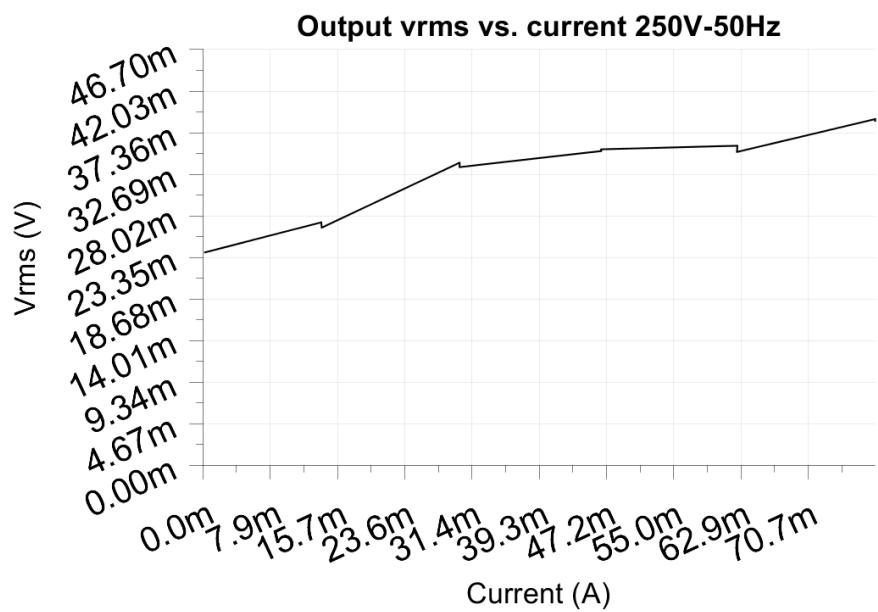


## 6 Turn on voltage

Testing when the PSU enables it's output

```
Test load: 0.009A
Test Frequency: 50Hz
Threshold: 9.000V
-----
Turn-on voltage: 40.00V
-----
Output voltage: 12.204V
```

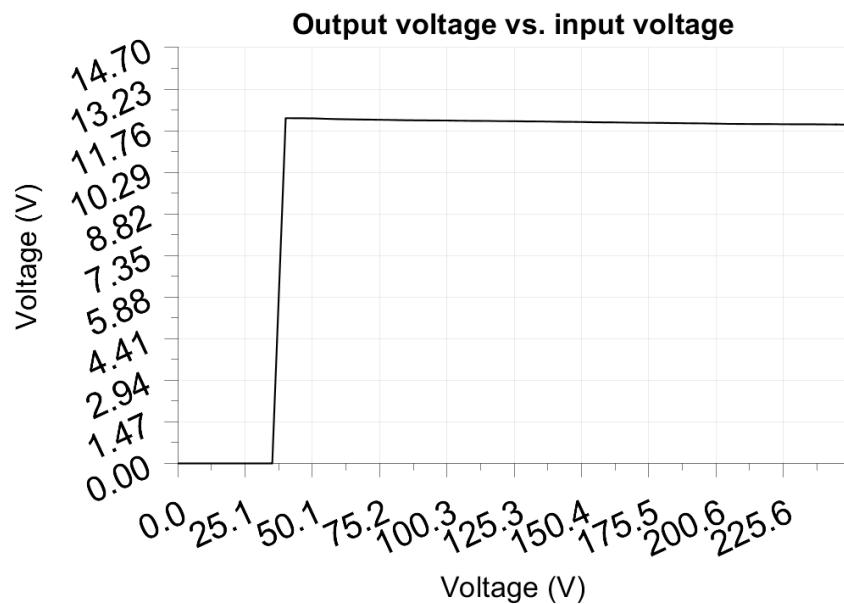

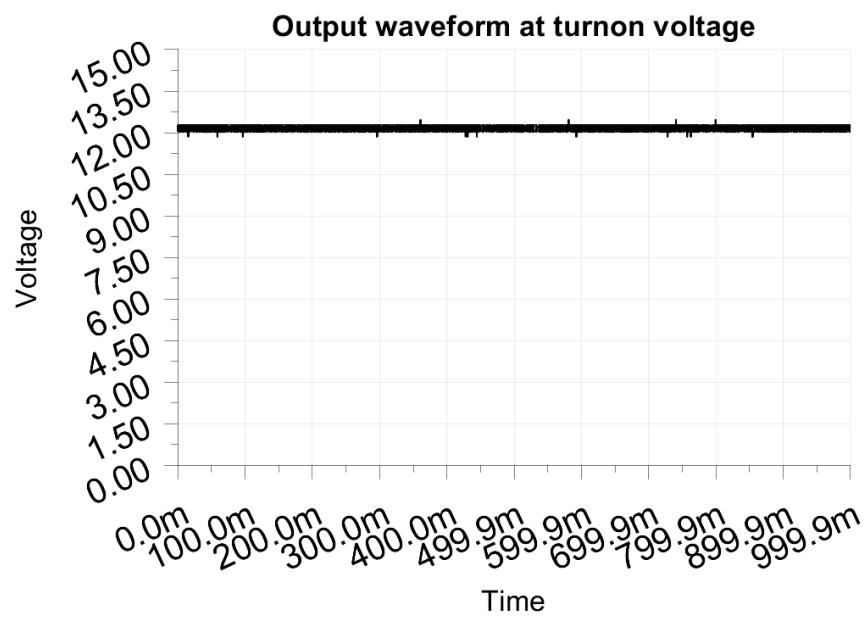

## **7 Conducted EMI**

No EMI test results

## **8 Overload testing**

No overload test results