



develop

PSU test report

Bernhard Woerndl-Aichriedler
bwa@xdevelop.at

1 Contents

- General information
- Point of operation
- Standby power consumption
- Load testing
- Turn on voltage
- Conducted EMI
- Overload testing

2 General information

Testing the following device

Manufacturer: Vigortronix
Device name: VTX-214-005-112
Serial number: 1
Nominal voltage: 12.000V
Nominal current: 0.420A
Tester: Bernhard Woerndl-Aichriedler <bwa@xdevelop.at>
Start time: 14-Jul-2016 00:03:18




3 Point of operation

The test has been conducted with the following conditions

Voltage/Frequency: 210V-50Hz

Ambient Temperature: 31.48C

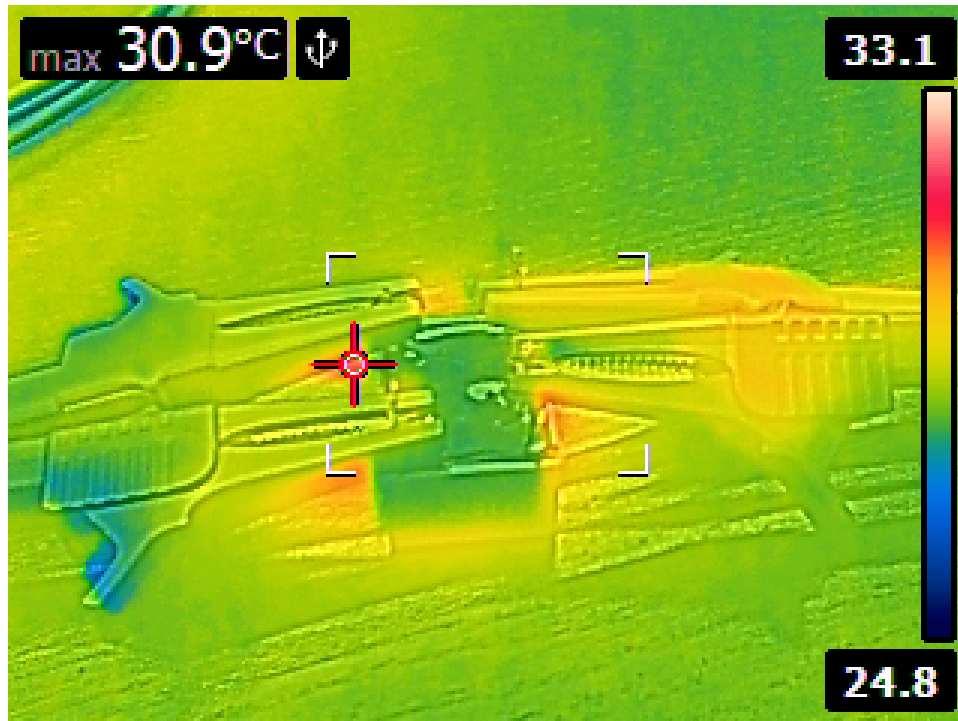



4 Standby power consumption

Voltage: 210.59V

Frequency: 50Hz

Current: 0.004021A


P active: 0.211W

P apparent: 0.854VA

P reactive: 0.827VAR

P factor: 0.247

Output voltage: 12.119V

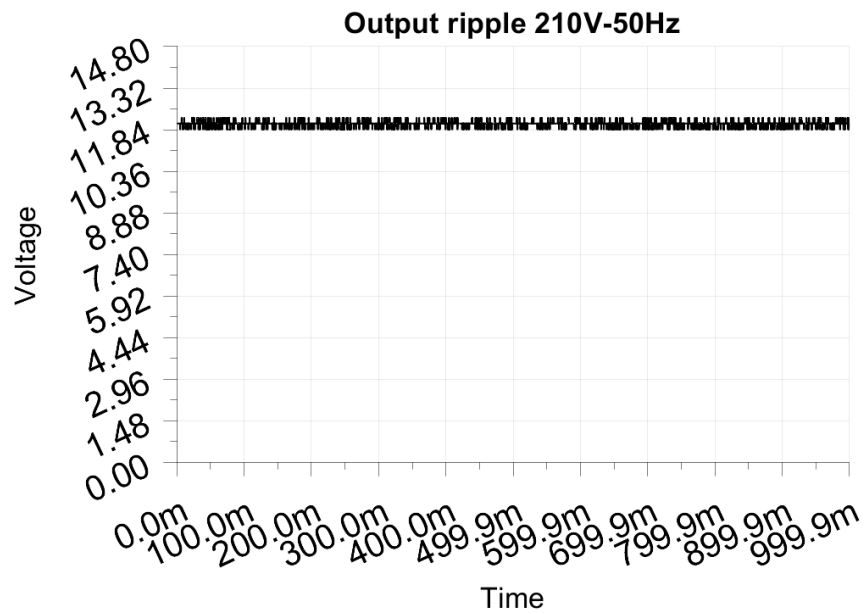

5 Load testing

Characteristics

Voltage: 210.60V

Frequency: 50Hz

Loads: 0.000A to 0.420A

Minimum output voltage: 12.020V

Maximum output voltage: 12.204V

Regulation error absolute: -0.020V/+0.204V


Regulation error relative: -0.2%/+1.7%


Vpp ripple&noise absolute: 0.480V


Vpp ripple&noise relative: 4.0%

RMS ripple&noise absolute: 0.068V

RMS ripple&noise relative: 0.6%

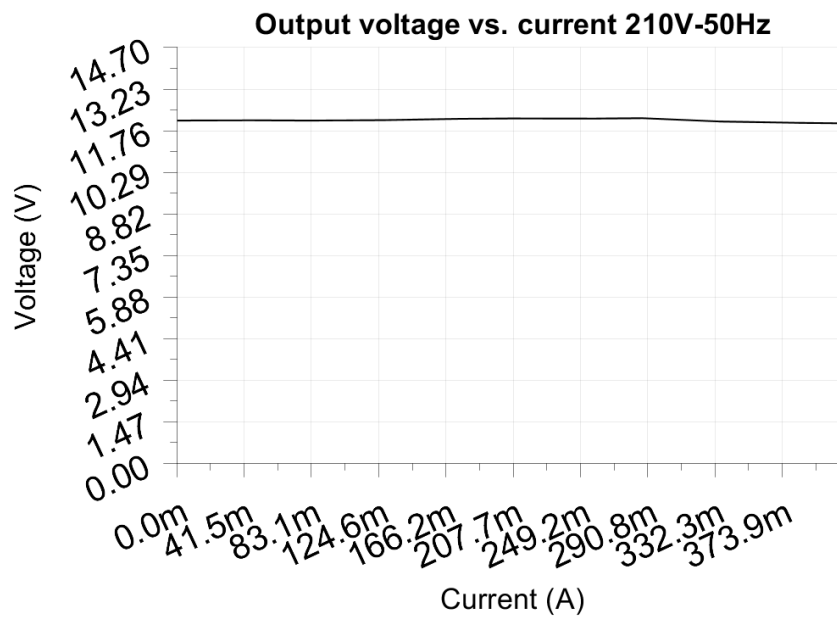

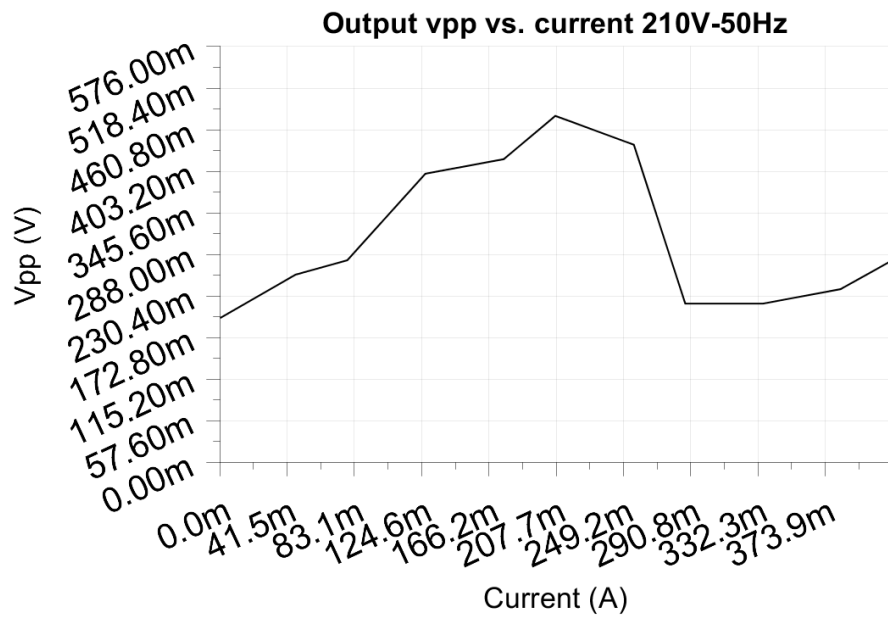

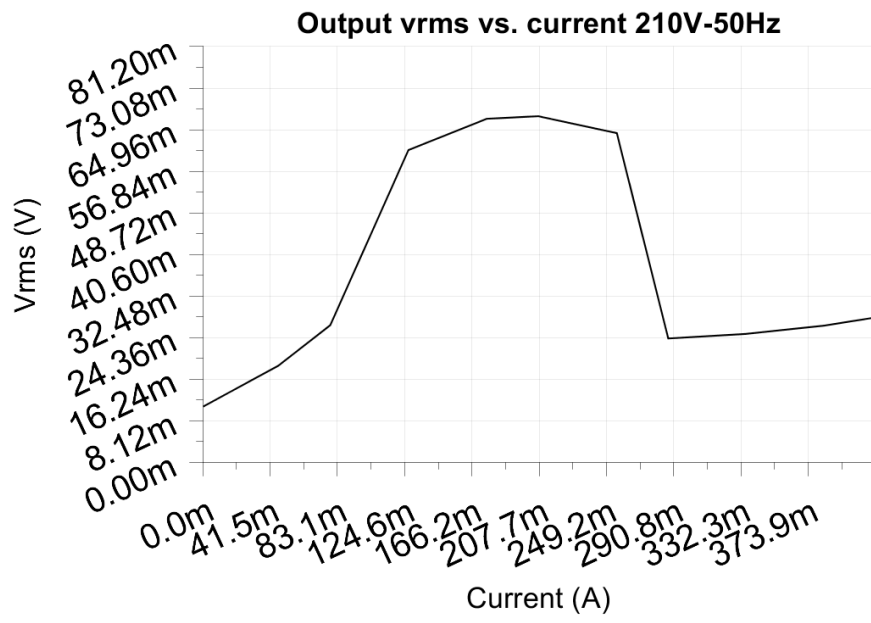

6 Turn on voltage

Testing when the PSU enables it's output


Test load: 0.042A


Test Frequency: 50Hz

Threshold: 9.000V

Turn-on voltage: 60.00V

Output voltage: 12.175V

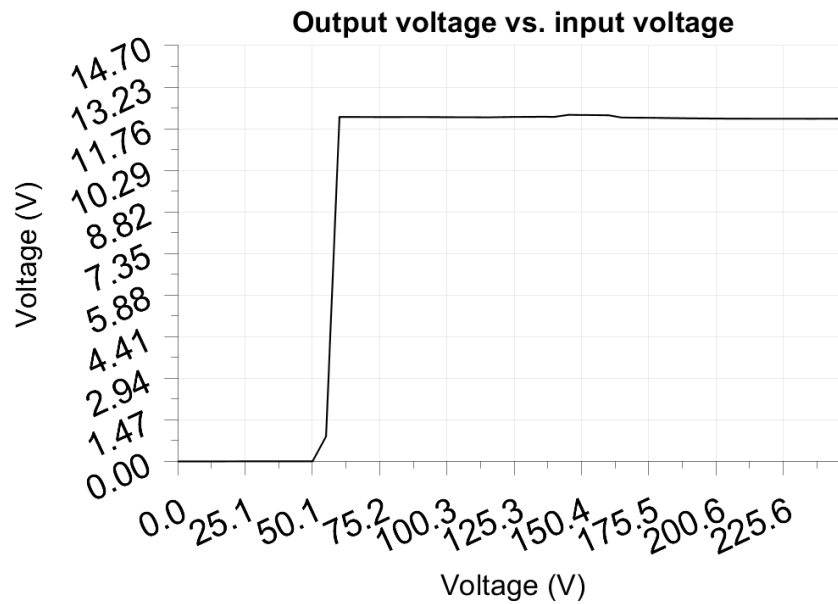

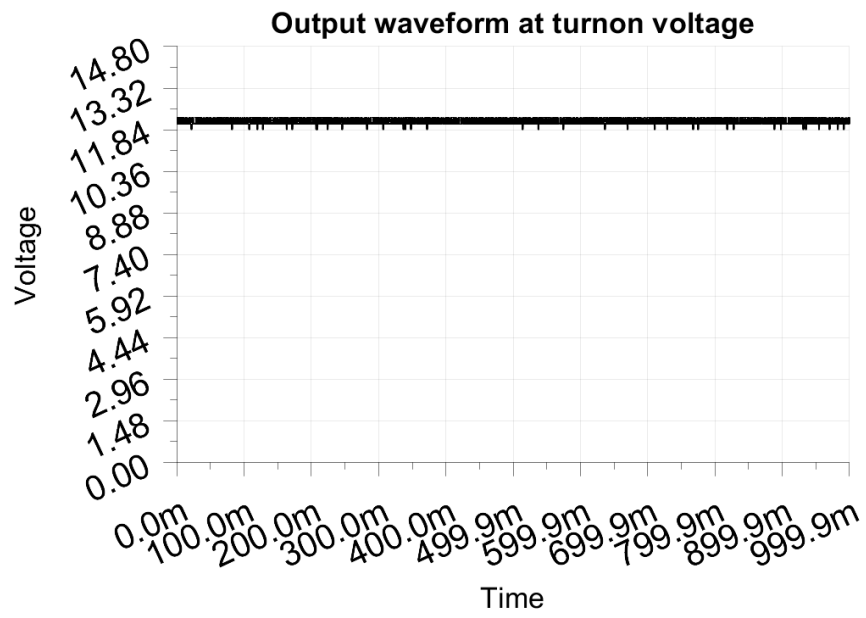

7 Conducted EMI

No EMI test results

8 Overload testing

No overload test results