



PSU test report

Bernhard Woerndl-Aichriedler

bwa@xdevelop.at

1 Contents

- General information
- Point of operation
- Standby power consumption
- Load testing
- Turn on voltage
- Conducted EMI
- Overload testing

2 General information

Testing the following device

Manufacturer: Vigortronix
Device name: VTX-214-006-112
Serial number: 1
Nominal voltage: 12.000V
Nominal current: 0.500A
Tester: Bernhard Woerndl-Aichriedler <bwa@xdevelop.at>
Start time: 13-Jul-2016 23:09:22




3 Point of operation

The test has been conducted with the following conditions

Voltage/Frequency: 210V-50Hz
Ambient Temperature: 30.79C



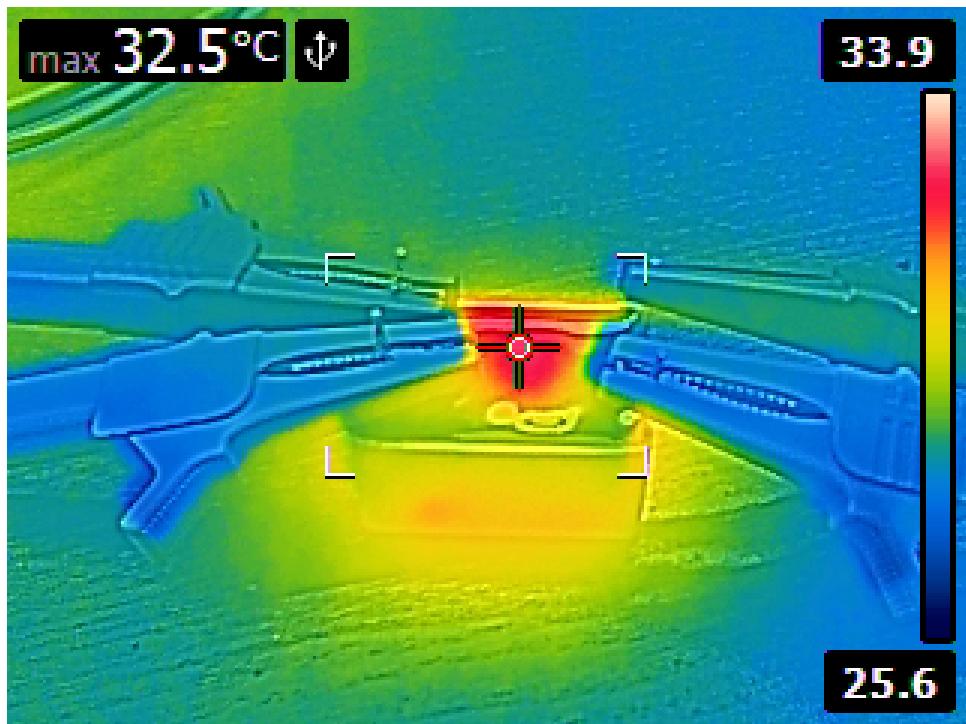

4 Standby power consumption

Voltage: 210.60V

Frequency: 50Hz

Current: 0.001635A

P active: 0.064W

P apparent: 0.344VA

P reactive: 0.338VAR

P factor: 0.186

Output voltage: 11.942V



5 Load testing

Characteristics

Voltage: 210.61V

Frequency: 50Hz

Loads: 0.000A to 0.500A

Minimum output voltage: 11.924V

Maximum output voltage: 11.942V

Regulation error absolute: -0.076V/+0.058V


Regulation error relative: -0.6%/+0.5%



Vpp ripple&noise absolute: 0.260V


Vpp ripple&noise relative: 2.2%

RMS ripple&noise absolute: 0.041V

RMS ripple&noise relative: 0.3%

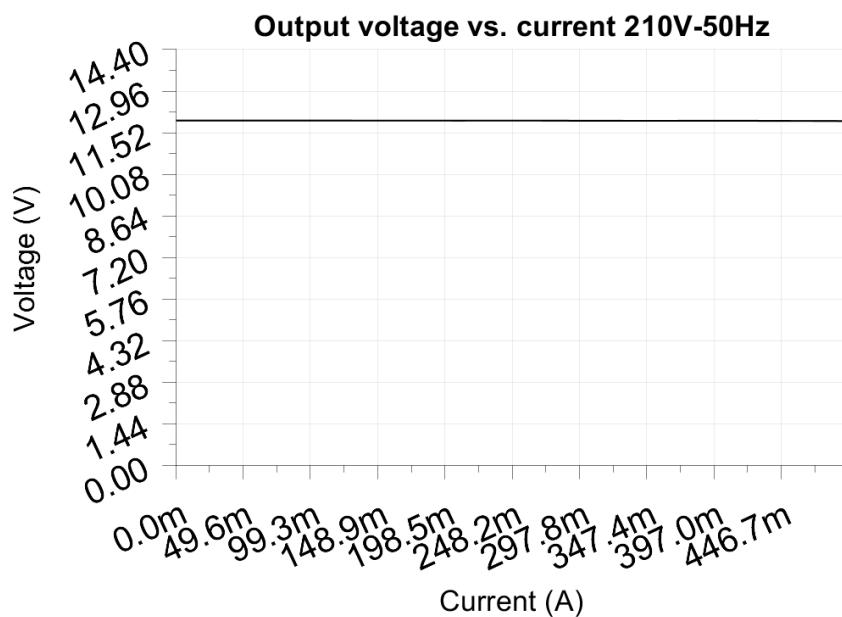

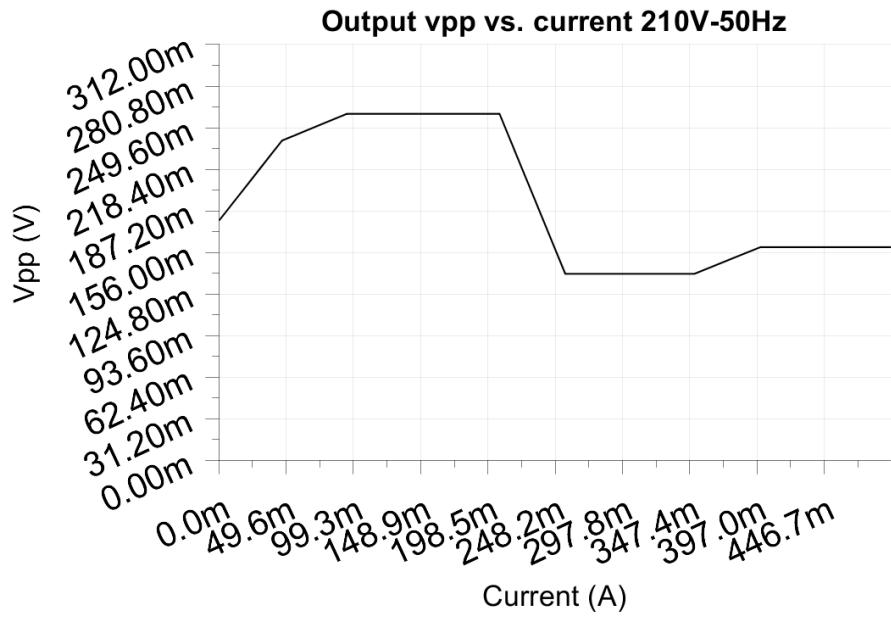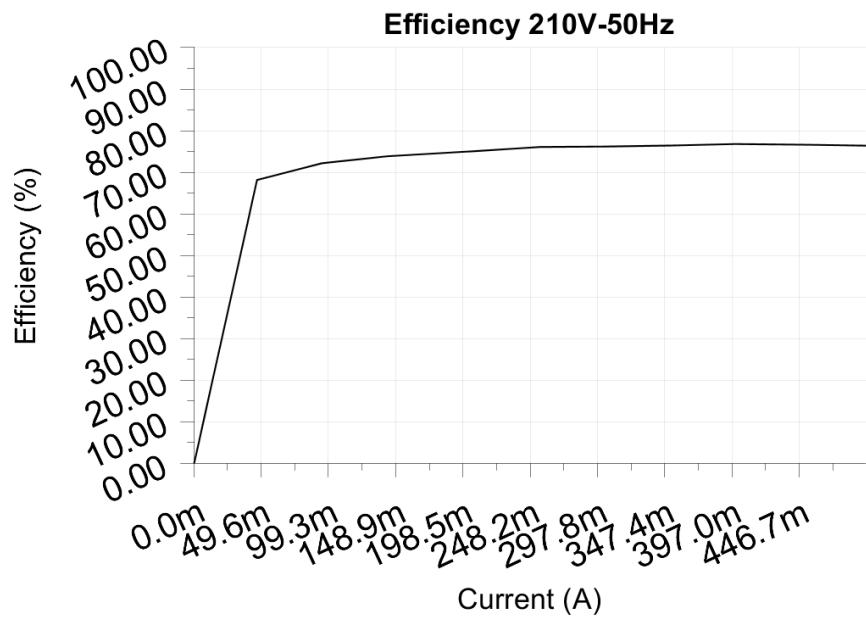


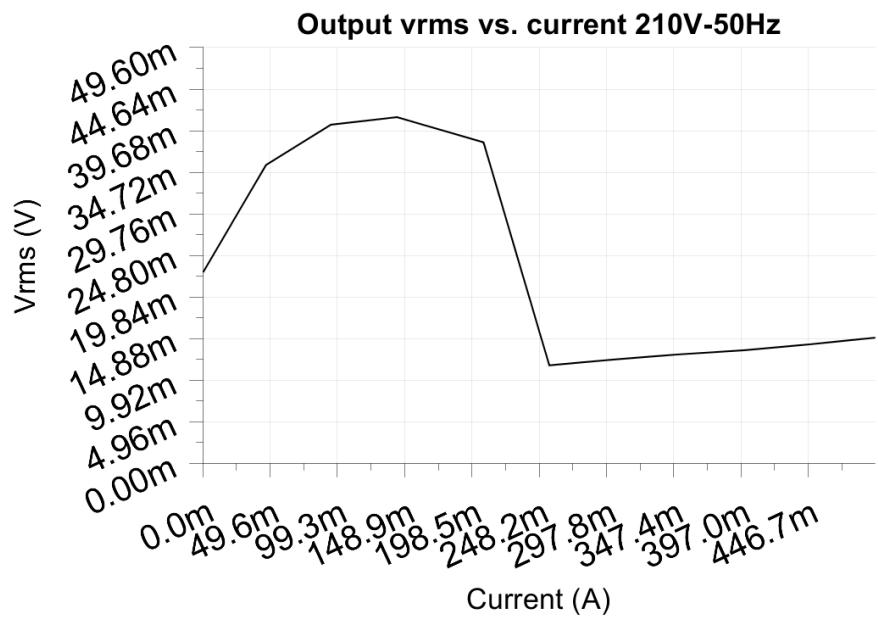


6 Turn on voltage

Testing when the PSU enables it's output

```
Test load: 0.050A
Test Frequency: 50Hz
Threshold: 9.000V
-----
Turn-on voltage: 35.00V
-----
Output voltage: 11.942V
```

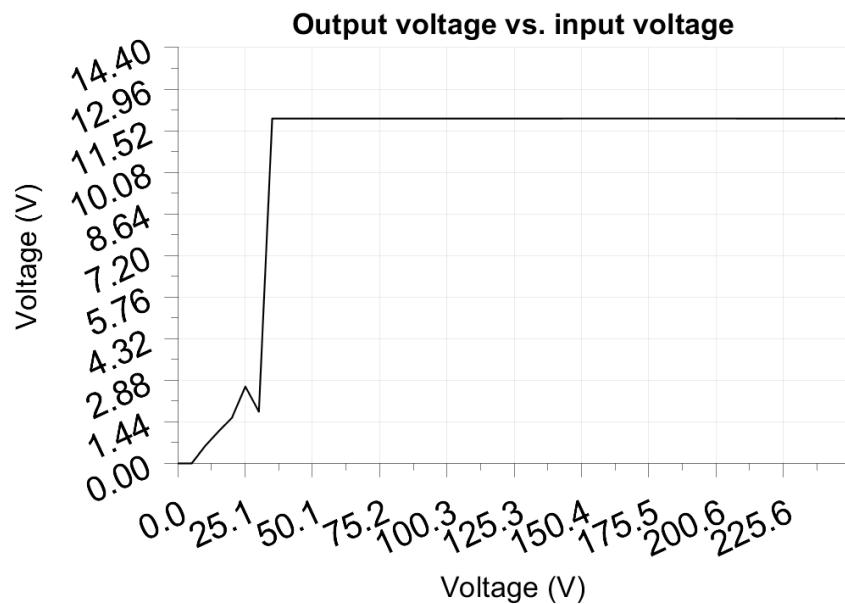

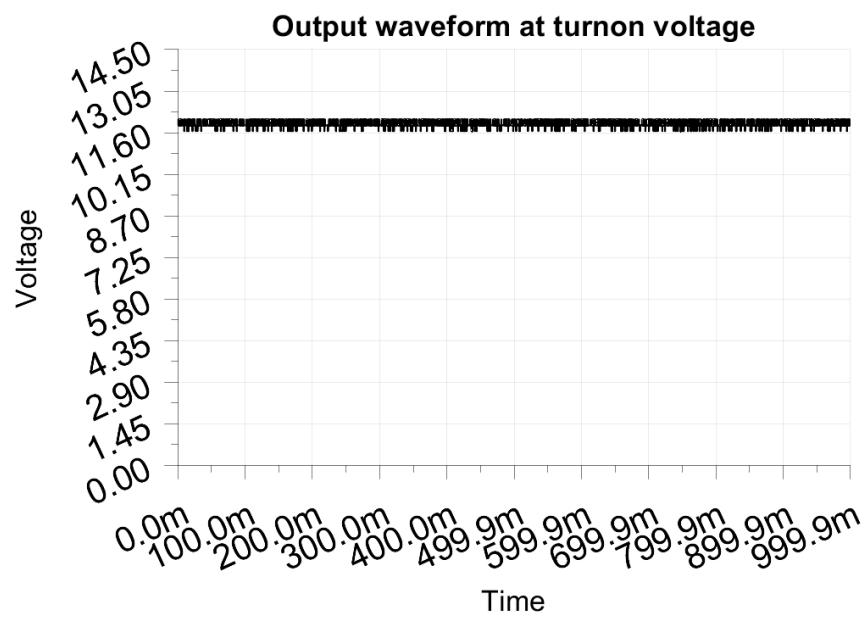

7 Conducted EMI

No EMI test results

8 Overload testing

No overload test results